

ELECTRONIC FLASH SIREN 12-24 V d.c. FS -601

Product description-Operation

The device FS-601 is a wall-mounted indoor flash siren. It was designed to fulfil the needs of fire safety and alarm systems. It operates with 8-28V d.c. The device was manufactured in conformity with provisions of directives and international standards EN-61000-3-2, EN-61000-3-3, EN-61000-6-1.

Installation


Install the device using the included mounting accessories. When screwing the siren, keep in mind that the cable should pass through the hole carefully, in order to avoid mechanical strain.

Connection

Connect the cables to the connection terminal that is located on the board, paying attention to the connection polarity. In case of incorrect connection, the siren does not work and the polarity must be reversed. The cable must have a minimum cross section of 0.75 mm².

Precautions

The device must be installed in a place with difficult access to children, indoor or in a covered outdoor spot. The siren must be protected from excessive moisture (steam) and heat (radiators). The connection of the device must be made by a qualified technician and after it has been ensured that the lines do not have voltage.

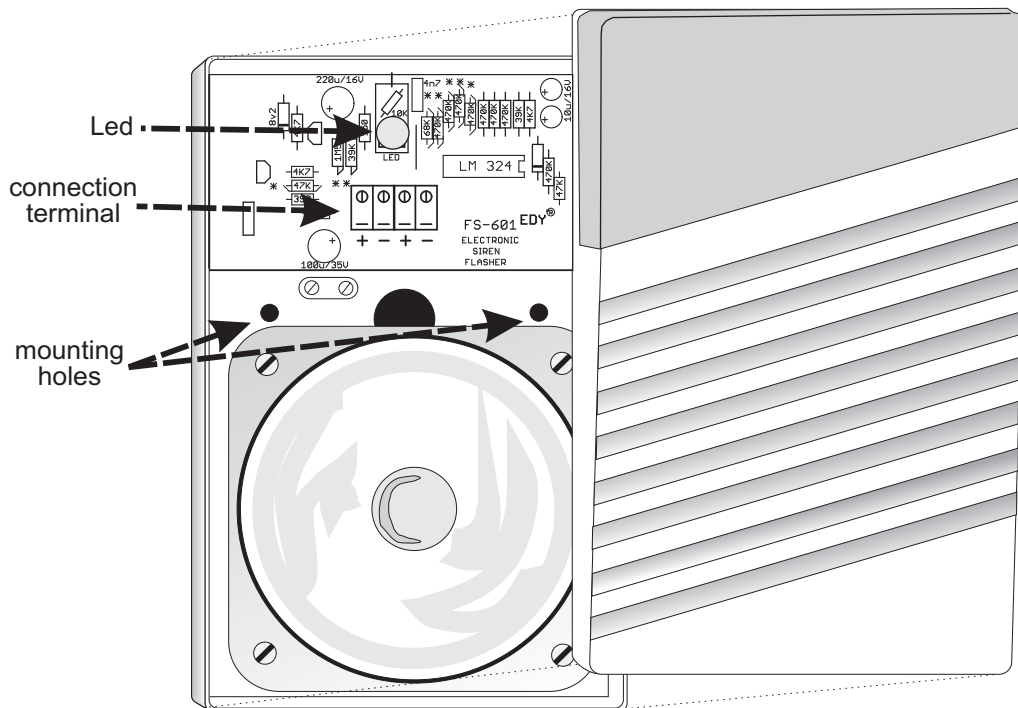

Technical specifications

Operating voltage	8-28V a.c.
Average power consumption	120mA
Sound output	95 db / m
Lamp	Led 120°
Operating temperature	-10 °C to +60 °C
Maximum humidity	95 %
Constraction material	ABS
Dimentionis	160mm x 100mm x 66mm



IP 20



Made in **Greece**

The company reserves the right to change the features for the purpose of improving the product.